
Air breather filter plug (EFB series)

Tank connection: Welded connection (DIN24557-2)

Material: Zinc plated steel body with stainless steel cover


Filter element: Cellulose (10 µm), polyurethane foam (40 µm)


with threaded connection



Type	Filtration	M	D	H	H1	H2	S	Flow rate	Valve
EFB150BA	10 µm	¼" GAS	47	45	12	7	19	150 l/min	-
EFB450BA	40 µm	¼" GAS	47	45	12	7	19	300 l/min	-
EFB176BC	10 µm	¾" GAS	76	66	16	7	35	450 l/min	-
EFB476BC	40 µm	¾" GAS	76	66	16	7	35	750 l/min	-
EFB176BCP	10 µm	¾" GAS	76	66	16	7	35	450 l/min	0.35 bar
EFB476BCP	40 µm	¾" GAS	76	66	16	7	35	750 l/min	0.35 bar

with flange connection

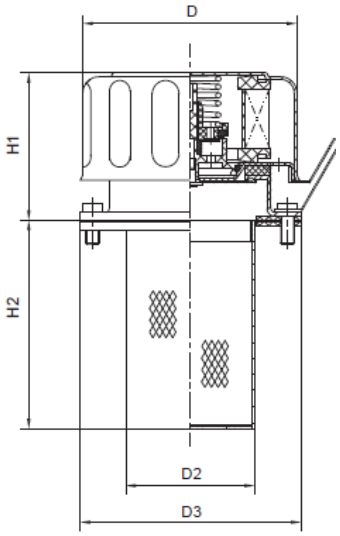

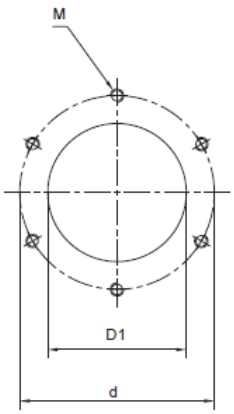


Type	Filtration	D	D2	D1	D3	H1	H2	d	M	Flow rate	Valve
EFB150H64	10 µm	47	29	31	52	48	64	41	3-M5	150 l/min	
EFB450H64	40 µm									300 l/min	
EFB180H78	10 µm	80	50	52	83	57	78	73	6-M5	450 l/min	-
EFB480H78	40 µm		50	52			78			750 l/min	-
EFB180H150	10 µm		50	52			150			450 l/min	-
EFB480H150	40 µm		50	52			150			750 l/min	-
EFB180H100	10 µm		38	40			100			450 l/min	-
EFB480H100	40 µm		38	40			100			750 l/min	-
EFB180H78P	10 µm		50	52			78			450 l/min	0.35 bar
EFB480H78P	40 µm		50	52			78			750 l/min	0.35 bar
EFB180H150P	10 µm		52	52			150			450 l/min	0.35 bar
EFB480H150P	40 µm		50	52			150			750 l/min	0.35 bar
EFB180H100P	10 µm		38	40			100			450 l/min	0.35 bar
EFB480H100P	40 µm		38	40			100			750 l/min	0.35 bar


For an optional padlock holder, please add letter "L".

Technical specification subject to change without prior notice. Other specification on request. 2013/07/23

Air breather filter (EFT series)

Tank connection:	Flange according to DIN 24557-2
Flow rate:	1800 l/min
Filtration:	10 µm
Temperature range:	-25ºC to 110ºC
Material:	Plastic housing & basket, NBR seal
Filter element:	Cellulose (10 µm)
Order no.:	EFT008-P10B

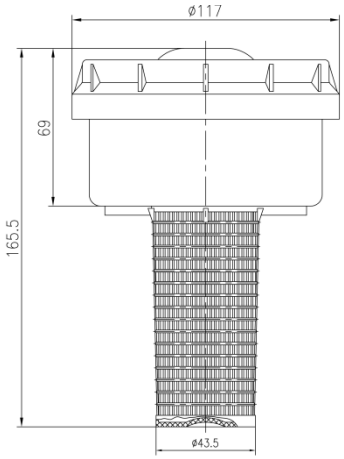


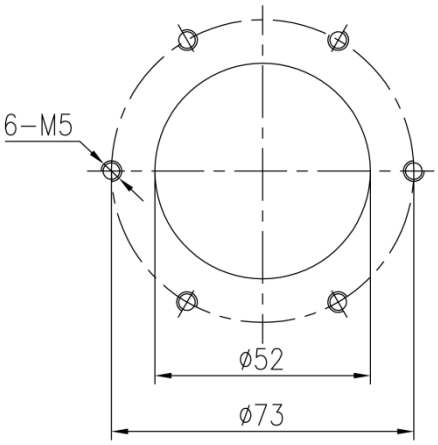


Extension tube for air breathers


to avoid leakage from the breather due to oil vapours or tilt of the tank. Fits all air breathers with DIN 24557-2 flange connection

Tank connection:	Flange according to DIN 24557-2
Material:	PA66 with NBR seals
Order no.:	EFT008-01

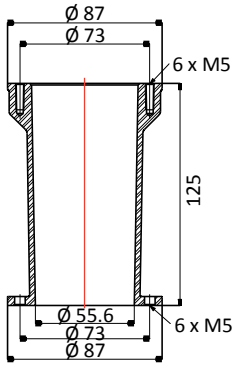



Example with EFT008 & EFB478G78

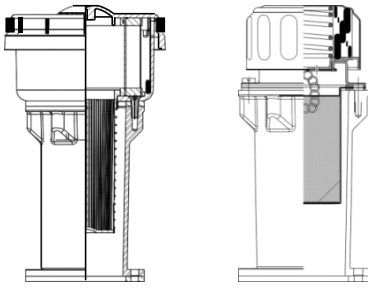

Anti-splash insert for EFT-008

Insert for the housing of EFT-008 to avoid vapour leakage in mobile applications

Material:	PA66, NBR seals
Order no.:	EFT008-05




Technical specification subject to change without prior notice. Other specification on request. 2013/07/23


Air breather filter with spin-on element (EFB series)

Tank connection:	Flange or welding
Flow rate:	1800 l/min to 2800 l/min
Filtration:	1.2 µm to 3 µm (air)
Temperature range:	-25ºC to 110ºC
Material:	Steel cartridge & connector

Welding connector

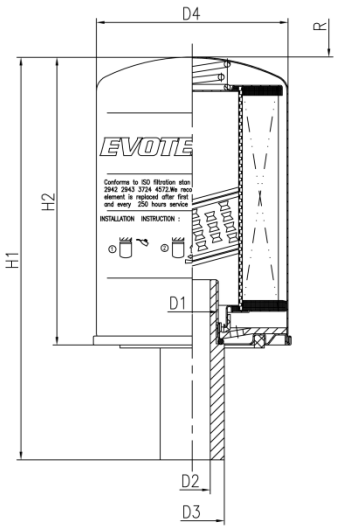


Flange connector

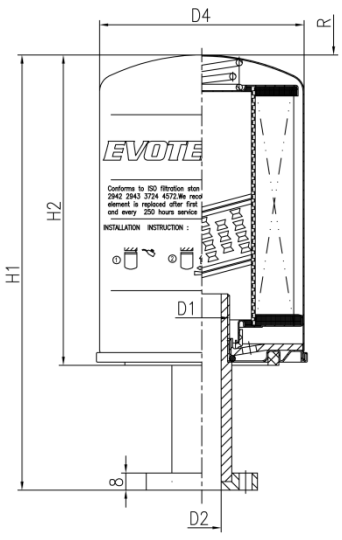


Mounting pattern

EFB001F & EFB002F



EFB003F & EFB004F



Type	Connector	Spare cartridge	Media		D1	D2	D3	D4	H1	H2	R	Flow rate
EFB001W	Welding	EEPS1B	P10	3 µm	¾" BSP	18	32	96	200	146	40	1800 l/min
EFB002W		EEPS2B			¾" BSP	18	32	96	246	191	40	1800 l/min
EFB003W		EEPS3B			1¼" BSP	32	48	129	236	181	40	2800 l/min
EFB004W		EEPS4B	F10	1.2 µm	1¼" BSP	32	48	129	281	226	40	2800 l/min
EFB001F	Flange	EEPS1B			¾" BSP	18	-	96	203	146	40	1800 l/min
EFB002F		EEPS2B			¾" BSP	18	-	96	249	191	40	1800 l/min
EFB003F		EEPS3B	F20	2 µm	1¼" BSP	32	-	129	239	181	40	2800 l/min
EFB004F		EEPS4B			1¼" BSP	32	-	129	284	226	40	2800 l/min
Example	EFB001W		F10									

Technical specification subject to change without prior notice. Other specification on request. 2013/07/23