


EVCC-A 系列



技术参数

描述:	插装单向阀
尺寸:	G 1/4", G 3/8" & G 1/2"
流量范围:	20, 50 & 80 l/min
开启压力:	0.5 bar (其他压力请咨询)
压力:	max. 350 bar
温度:	-30°C to 110°C
粘度:	30 to 100 mm ² /s (cSt) at 40°C
推荐过滤精度:	25 µm
兼容性:	适用于液压油 根据DIN51524
重量:	max. 0.019 kg


液压符号:




订货信息

订货型号	尺寸	最大流量	最大压力	开启压力	扭矩	重量
EVCC-A14	G ¼"	20 l/min	350 bar	0.5 bar	6 Nm	0.005 kg
EVCC-A38	G ⅜"	50 l/min	350 bar	0.5 bar	6 Nm	0.011 kg
EVCC-A12	G ½"	80 l/min	350 bar	0.5 bar	10 Nm	0.019 kg


压降图(Δp)

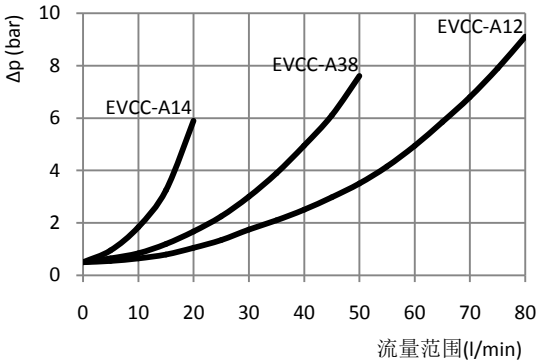

图纸

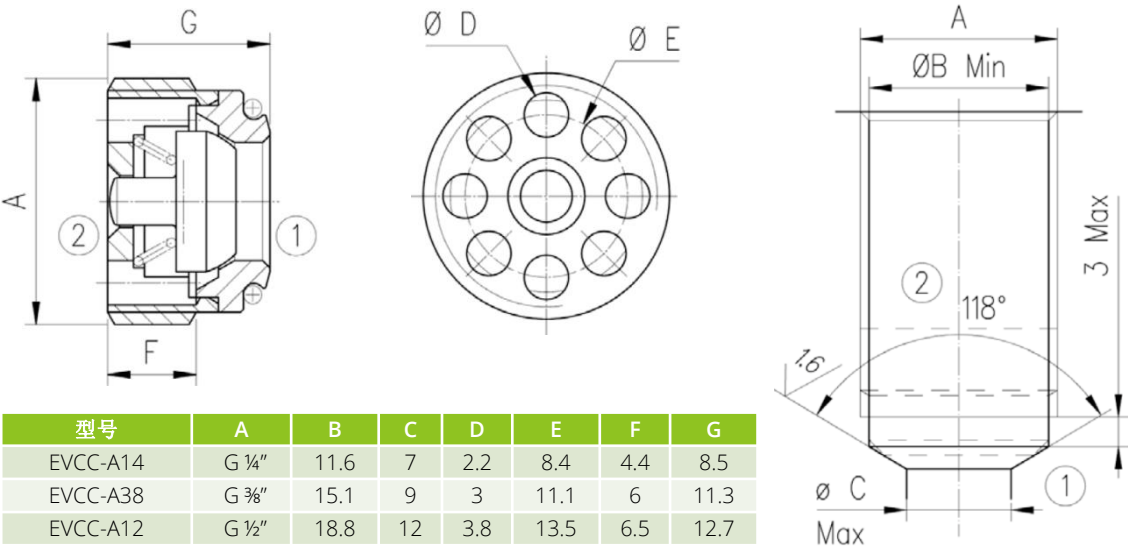

Installation tool

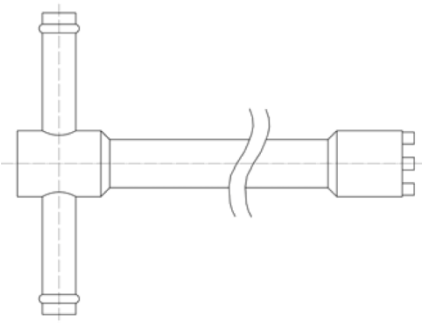

型号	尺寸
EVCC-A14IT	G ¼"
EVCC-A38IT	G ⅜"
EVCC-A12IT	G ½"

Technical specification subject to change without prior notice. Other specification on request. 2013/07/23