

EAVL-D Series

EVOTEK level switches




Product Description

- Can be dismounted without removing the tank cap
- Direct mounting on tank lid
- Level control in the tank
- Suitable with many different fluids
- With any length up to 1000mm possible

Technical Specifications

Application	Electromagnetic level switches
Port Sizes:	Fastening by means of flange or screw connection
Material	
Flange/Threaded body:	Aluminium
Seals:	NBR or FPM or EPDM
Tube:	Stainless Steel
Float:	Stainless Steel
Temperature range:	-25°C to 110°C
Instrument plug:	DIN43650A
Protection:	IP65
Switching current:	max. 1.5 A
Switching voltage:	max. 220 V AC / 50 V DC
Switching power:	80 W

EAVL-D Electromagnetic level switches

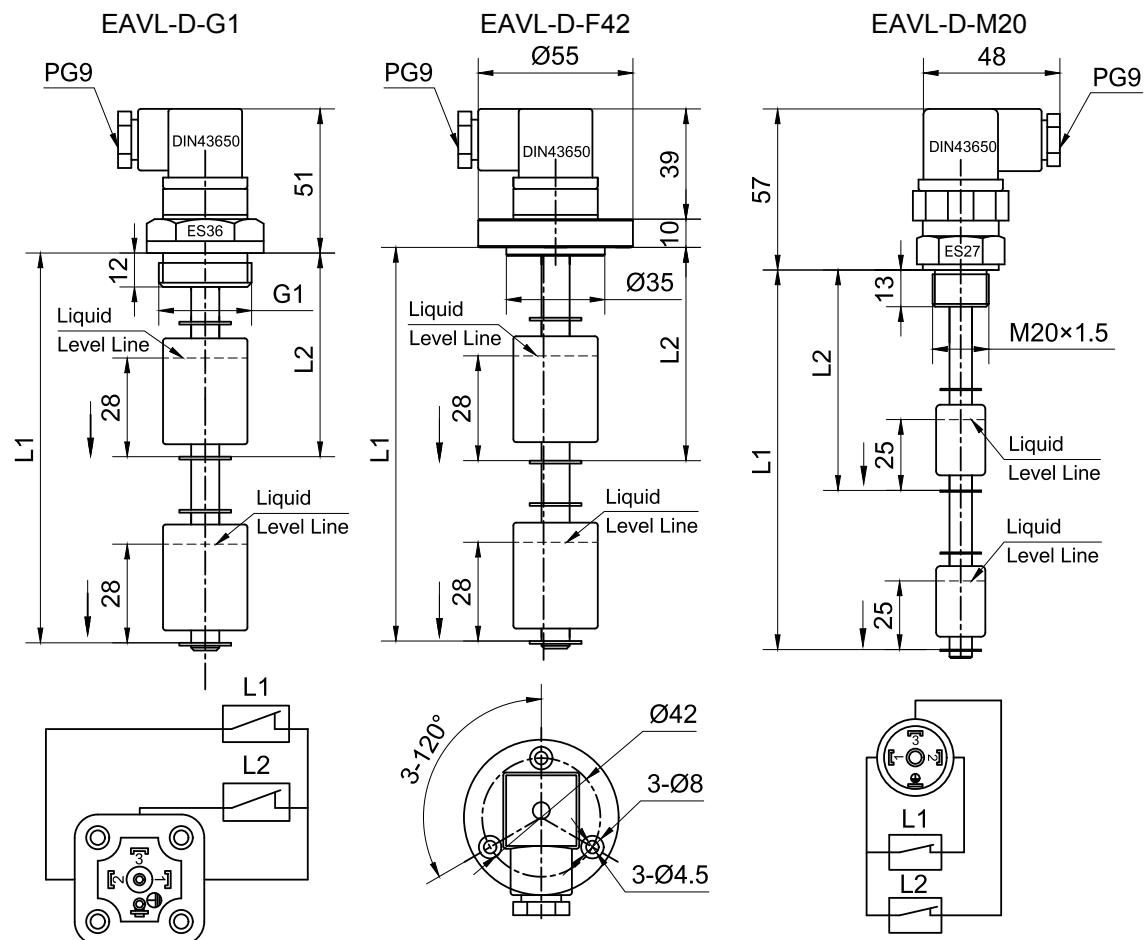

Order Codes

Series - A - B - C D E F

EAVL-D - G1 - 500 - 350 B NO NO

A Size Spare cartridge

G1 G 1" thread connection

F42 3 holes flange

M20 M20 thread connection

B Length (L1)

150

200

250

300

400

500

600

800

1000

C Length (L2)

According to request

D Seal

B NBR

V FPM

E EPDM

E Lower Level switch

NO Normally opened in presence of fluid

NC Normally closed in presence of fluid

SPDT Exchange

F Higher Level switch

NO Normally opened in presence of fluid

NC Normally closed in presence of fluid

SPDT Exchange