


目视油标 (EAPV 系列)


EAPV 材料：透明尼龙。耐溶剂、耐油、油脂、酸和碱，应避免与醇类接触。为了增加油标的可视度，配备了放大镜，而且在星型铝片中心标记红点。最高温度：110°C。

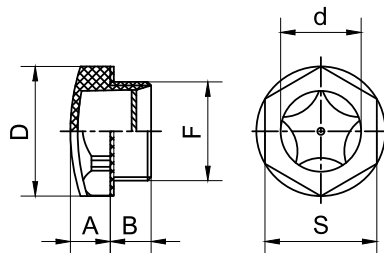

型号	扭矩	F	A	B	D	d	S	型号	扭矩	F	B	A	D	d	S
EAPV-1/4"G	3 Nm	1/4" G	8	8	17	9	15	EAPV-16x1.5	3 Nm	M16x1.5	8	7	22	11	19
EAPV-3/8"G	5 Nm	3/8" G	9	9	22	11	19	EAPV-20x1.5	10 Nm	M20x1.5	9.5	8	26	14	22
EAPV-1/2"G	6 Nm	1/2" G	9	10	27	16	22	EAPV-25x1.5	10 Nm	M25x1.5	8	9	31.5	18	27
EAPV-3/4"G	8 Nm	3/4" G	10	12	32	20	27	EAPV-26x1.5	10 Nm	M26x1.5	13	9	31.5	18	27
EAPV-1"G	10 Nm	1" G	11	14	40	25	34	EAPV-27x1.5	10 Nm	M27x1.5	9	9	31.5	20	27
EAPV-1 1/4"G	10 Nm	1 1/4" G	17	12	50	40	40.5	EAPV-30x1.5	10 Nm	M30x1.5	9	10	35	22	30
								EAPV-35x1.5	10 Nm	M35x1.5	11	10	40	25	34
								EAPV-40x1.5	10 Nm	M40x1.5	11.5	13	47.5	30	40.5

目视油标 (EAPC 系列)


EAPC 材料：透明尼龙。耐溶剂、耐油、油脂、酸和碱，应避免与醇类接触。最高温度：130°C。

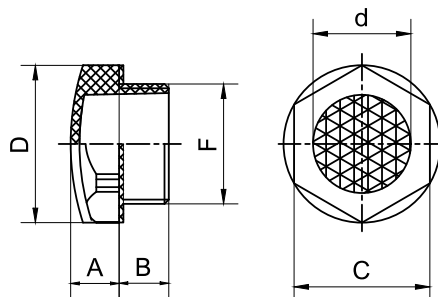

型号	扭矩	F	B	A	D	d	C
EAPC-1/4"G	3 Nm	1/4" G	10	6	18	9	15
EAPC-3/8"G	5 Nm	3/8" G	7.5	7	22	11	19
EAPC-1/2"G	6 Nm	1/2" G	10.5	8	26	14	22
EAPC-3/4"G	8 Nm	3/4" G	10.5	9	31.5	20	27
EAPC-1"G	10 Nm	1" G	11	10	40	25	34

目视油标 (EAPR 系列)

EAPR 材料：透明尼龙。最高温度：110°C。

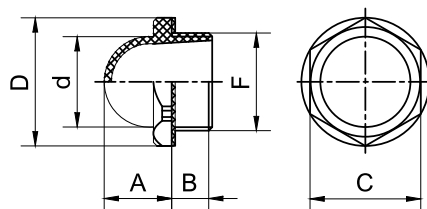

型号	扭矩	F	B	A	D	d	C
EAPR-3/8"G	5 Nm	3/8" G	7.5	13	22.5	15	19
EAPR-1/2"G	6 Nm	1/2" G	10.5	16	26	19	22
EAPR-3/4"G	8 Nm	3/4" G	10.5	19.5	31.5	25	27
EAPR-1"G	10 Nm	1" G	11	24	42	31	36
EAPR-1 1/4"G	15 Nm	1 1/4" G	11.5	26.5	46.5	38	40.5