


EVCD-CVR08P CHECK VALVE

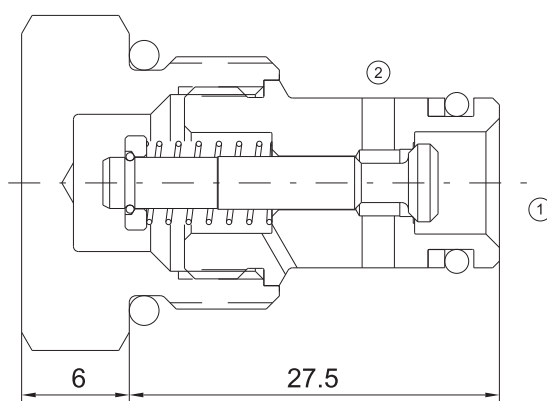

Technical Specifications

Operating Pressure :	350Bar
Flow :	25L/min
Maximum internal leakage :	2drops/min at 350bar
Operating temperature :	-30°C to +120°C (-22°F to +250°F)
Cavity :	VC08-2
Fluids:	Mineral based or synthetic hydraulic fluid with lubricating properties
Fluid viscosity range :	7.4 to 420cSt.

Features

- Hardened seat for long life
- Compact size
- Industry common cavity
- Low leakage design

Operation

Pressure at ① overcomes the spring-bias poppet and allows free flow ① to ②,

Flow in the opposite direction, from ② to ① is blocked by the poppet.

Symbol

