


EVCD-LS10-30 SHUTTLE VALVE

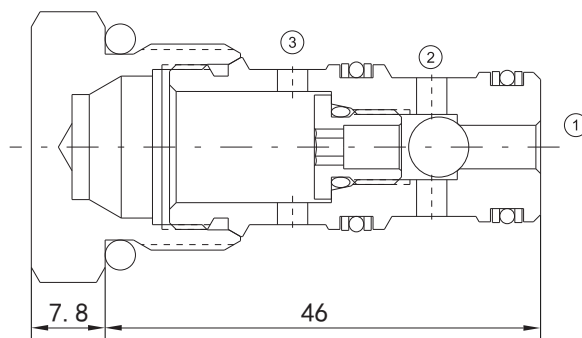

Technical Specifications

Operating Pressure :	240Bar
Flow :	30L/min
Maximum internal leakage :	0.25ml/min at 240bar
Operating temperature :	-30°C to +120°C (-22°F to +250°F)
Cavity :	VC10-3
Fluids:	Mineral based or synthetic hydraulic fluid with lubricating properties
Fluid viscosity range :	7.4 to 420cSt.


Features

- Hardened seat for long life
- Compact size
- Industry common cavity
- Low leakage design

Operation

The valve will allow flow from the higher pressure port 1 or 3 to port 2

Symbol




Order Codes

Base Model		Seals	
EVCD	-	LS10-30	- Table 1
Example EVCD	-	LS10-30	- B

Table 1	
Code	Seals
B	NBR
V	FKM

Performance Curves

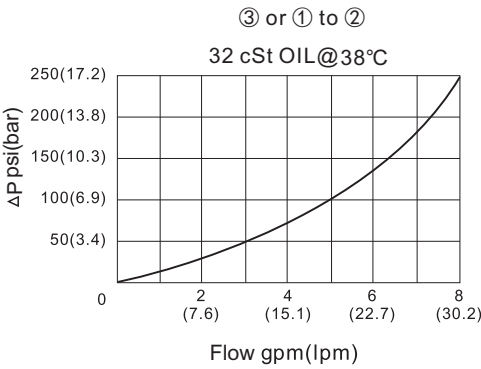

Installation Dimensions

