


# EVCE-SV08-28

## 2-way ,2-position

### Normally Closed Bidirectional Blocking

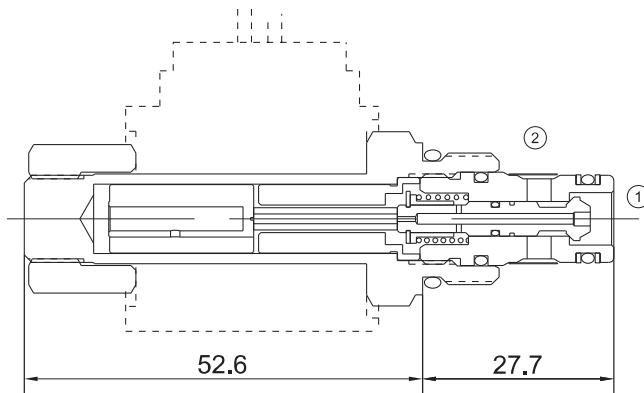

#### Technical Specifications

Operating Pressure :	240Bar
Flow :	19L/min
Internal leakage :	5 drops/min at 240bar
Operating temperature :	-30°C to + 120°C (- 22°F to + 250°F)
Cavity :	VC08-2
Fluids:	Mineral based or synthetic hydraulic fluid with lubricating properties
Fluid viscosity range :	7.4 to 420cSt.


#### Features

- Hardened seat for long life
- Compact size
- Industry common cavity
- Continuous-duty rated solenoid
- Optional coil voltages and terminations

#### Operation

When de-energized, the EVCE-SV08-28 blocks flow in both directions. When energized, the poppet opens the valve bi-directionally.

#### Symbol



## Order Codes

	Base Model		Option	Seals	Voltage	Coil Connection	
	EVCE	-	SV08-28	Table 1	Table 2	Table 3	Table 4
Example	EVCE	-	SV08-28	M	B	24	H


Table 1	
Code	Option
Blank	Not Manual
M	Manual Emergency

Table 2	
Code	Seals
B	NBR
V	FKM

Table 3	
Code	Voltage
12	12VDC
24	24VDC
110	110VAC
220	220VAC

Table 4	
Code	Coil Connection
H	DIN43650
F	Deutsch DT04-2P
A	Amp Plug
D	Double Lead
S	Single Lead

## Performance Curves

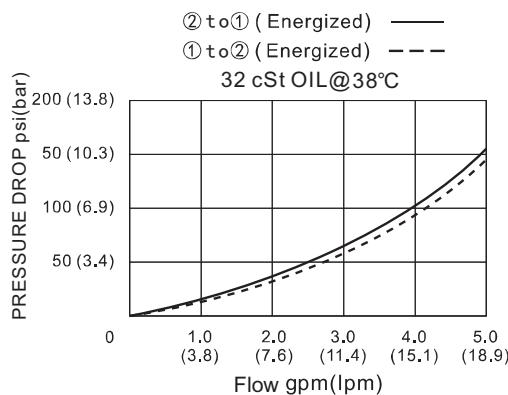

## Installation Dimensions

