


EVCE-SV2-10-2NOR

2-way ,2-position(Normally Open)

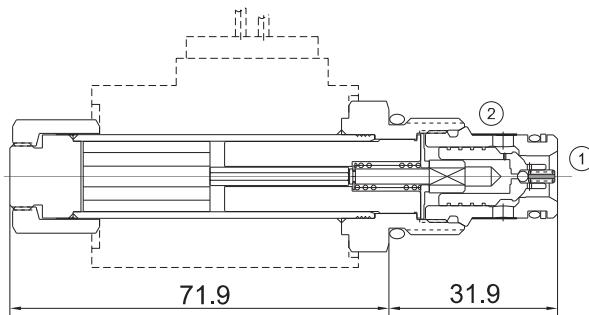

Technical Specifications

Operating Pressure :	207Bar
Flow :	68L/min
Internal leakage :	3 drops/min at 207bar
Operating temperature :	-30°C to + 120°C (-22°F to + 250°F)
Cavity :	VC10-2
Fluids:	Mineral based or synthetic hydraulic fluid with lubricating properties
Fluid viscosity range :	7.4 to 420cSt.


Features

- Hardened seat for long life
- Compact size
- Industry common cavity
- Continuous-duty rated solenoid
- Optional coil voltages and terminations

Operation

When de-energized, the EVCE-SV2-10-2NOR poppet lifts to open from port 2 to port 1. In this mode, flow is also allowed from port 1 to port 2. When energized, the cartridge acts as a check valve, blocking flow from port 2 to port 1, while allowing flow in the reverse direction.

Symbol



Order Codes

	Base Model	Normally Open	Option	Seals	Voltage	Coil Connection
	EVCE - SV2-10-2	NOR	Table 1	Table 2	Table 3	Table 4
Example	EVCE - SV2-10-2	NOR	M	B	24	H


Table 1	
Code	Option
Blank	Not Manual
M	Manual Emergency

Table 2	
Code	Seals
B	NBR
V	FKM

Table 3	
Code	Voltage
12	12VDC
24	24VDC
110	110VAC
220	220VAC

Table 4	
Code	Coil Connection
H	DIN43650
F	Deutsch DT04-2P
A	Amp Plug
D	Double Lead
S	Single Lead

Performance Curves

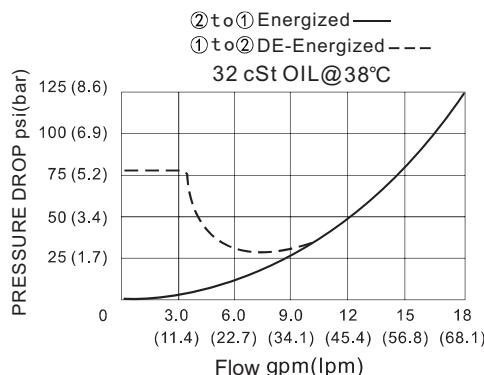

Installation Dimensions

